

# Slimline & Portable Cladding Lifters

## Mini-Clad [400kg]



One of the lightest and slimmest models in our range, the dual circuit Mini-Clad is the industry's most powerful 'configuration-free' cladding lifter for speedy installation on site.

This compact lifter is quick to set up and offers fuss-free lifting thanks to its unique quad-pad suction frame. An extra-safe dual circuit vacuum system provides powerful, trustworthy lifting up to 400kg and can comfortably lift vertical wall panels up to 18 metres, horizontal panels up to 8 metres and roof panels up to 5 metres long depending on thickness.

Boasting 90° tilt and 360° rotation for effortless installation, the Mini-Clad is compatible with GGR's range of mini cranes and pick and carry cranes. This lifter can also be fitted to a telehandler or fork lift using our foldable fork lift attachment.

### Key Features

- Capacity: 400kg
- Suitable for vertical wall panels up to 18m, horizontal wall panels up to 8m and roof panels up to 5m
- Dual circuit vacuum system with vacuum gauge, reserve tank and non-return valve for each circuit
- 90° manual tilt
- 360° manual continuous lockable rotation
- 110/240v external charger system
- Audio-visual low vacuum warning
- On-board control panel and suction release

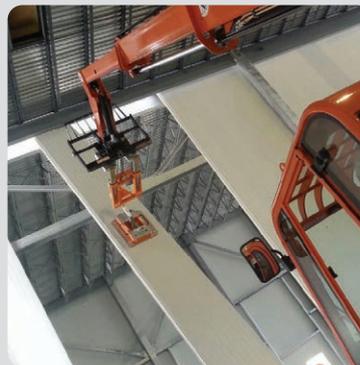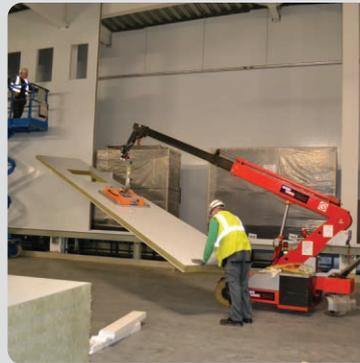

### Reference Codes

Mini-Clad - **VCL09**


### Technical Specifications

<b>Safe working load</b>	capacity:	400kg
<b>Number of suction cups</b>	cups:	4 within 1 x 960mm x 720mm pad
<b>Maximum panel length</b>	horizontal:	8 metres
	vertical:	18 metres
	roof:	5 metres
	ceiling:	n/a
<b>Suction cup</b>	description:	closed cell foam seal
	approx dimensions:	960mm (l) x 720mm (w)
<b>Suitable for lifting</b>	materials:	composite sandwich panels, (PUR, EPS, mineral wool), other materials possible, subject to testing. airtight, non-porous and not covered by protective film. flat smooth, MR and MMR Panels <b>ONLY</b> .
<b>Weight</b>	weight:	100kg
<b>Rotation</b>	rotation:	360° manual continuous lockable at every 90°
<b>Tilt</b>	tilt:	90° manual
<b>Vacuum system</b>	dual circuit:	2 pumps, 2 vacuum reserve tanks
<b>Voltage</b>	pump:	2 x 12v (24v) DC from rechargeable batteries
	battery charger:	110v/240v external charger system
<b>Standard accessories</b>	standard:	adjustable lift bail, external charger, secondary safety straps
<b>Optional accessories</b>	optional:	radio remote control

# dding Lifter



Manual 90° tilt

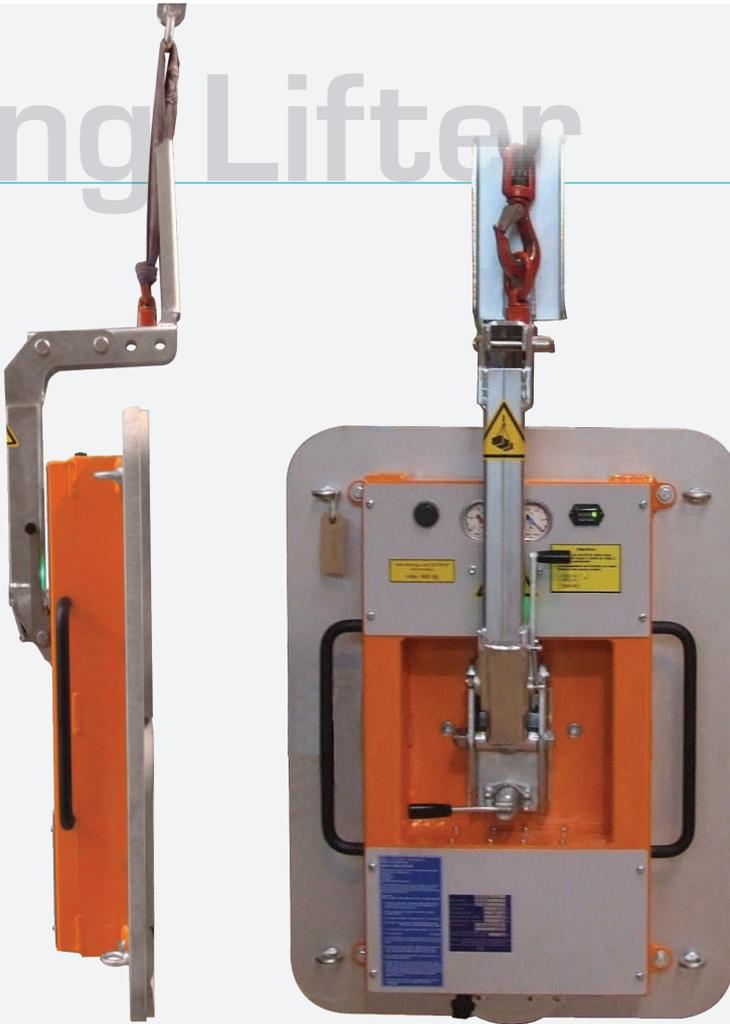

Mini-Clad suction pad  
960mm (l) x 720mm (w)

### Technical Data - (approx. mm)

