

Cladding Lifters

Popular Slimline Claddi

Slimline Mini-Clad [400kg]

Improving on one of our most popular cladding machines the Mini-Clad has been upgraded to the new Slimline version and the result is an even more compact profile, yet still retaining its position as the industry's most powerful 'configuration-free' cladding lifters.

Lighter and slimmer with the ability to lift up to 400kg, operators are able to complete fuss-free lifting thanks to the quad-pad suction frame. The dual-circuit vacuum system provides safe lifting of vertical wall panels up to 18m long, horizontal panels up to 8m long and roof panels up to 5m long (depending on thickness).

The Slimline Mini-Clad comes complete with manual 90° tilt and 90° left & right rotation for effortless installation, it is also compatible with GGR's range of mini spider cranes, mini crawler cranes and trailer cranes.

Key Features

- Capacity: 400kg
- Suitable for vertical wall panels up to 18m, horizontal wall panels up to 8m and roof panels up to 5m
- Dual circuit vacuum system with vacuum gauge, reserve tank and non-return valve for each circuit
- 90° manual tilt
- 90° manual left & right
- 110/240v external charger system
- Audio-visual low vacuum warning
- On-board control panel and suction release



Reference Code

VCL11

Technical Specifications

Safe working load	capacity:	400kg
Number of suction cups	cups:	4 within 1 x 860mm x 670mm pad
Maximum panel length	horizontal: vertical: roof: ceiling:	8 metres 18 metres 5 metres n/a
Suction cup	description: approx dimensions:	closed cell foam seal 860mm (l) x 670mm (w)
Suitable for lifting	materials:	composite sandwich panels, (PUR, EPS, mineral wool). other materials possible, subject to testing. airtight, non-porous and not covered by protective film. flat smooth, MR and MMR Panels ONLY .
Weight	weight:	80kg
Rotation	rotation:	90° manual left & right
Tilt	tilt:	90° manual
Vacuum system	dual circuit:	2 pumps, 2 vacuum reserve tanks
Voltage	pump: battery charger:	2 x 12v (24v) DC from rechargeable batteries 110v/240v external charger system
Standard accessories	standard:	standard length lifting arm with adjustable lift bail, external charger, secondary safety straps
Optional accessories	optional:	radio remote control, variable length lifting arm

ng Lift



Manual 90° tilt



Horizontal Wall Panels
With Standard Length
Lifting Arm



Vertical Wall Panels
With Standard Length
Lifting Arm

With two options of lifting arm the Slimline Mini-Clad can be used in a variety of applications.



The Slimline Mini-Clad features a low vacuum warning light and a low vacuum audio alarm.




Safety is paramount with the Slimline Mini-Clad by featuring a dual circuit vacuum system.



Features also include a panel protection plate, to keep your cladding safe while installing.



Technical Data - (approx. mm) Standard Length Lifting Arm

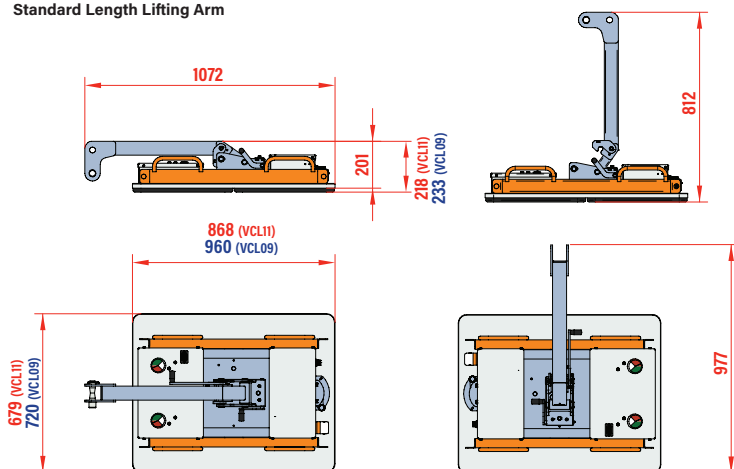

Technical Data - (approx. mm) Variable Length Lifting Arm

