

Lifting Solutions

MRC 751 Floor Crane [720kg]

The MRC 751 is a compact rotating floor crane engineered for precise lifting in restricted or congested workspaces. Its 360° slewing capability allows loads to be positioned accurately without needing to reposition, making it ideal for internal construction zones, production facilities and tight access areas.

The crane delivers a maximum lifting capacity of up to 720kg at minimum outreach, with the load rating decreasing progressively as the boom is extended. The telescopic boom provides multiple pinned positions for reach adjustment, and an optional extension increases the maximum outreach to approximately 2.52m. The adjustable counterweight system, using modular weight boxes, provides stable operation across varying load and reach requirements.


Designed for efficiency, the MRC 751 offers a compact chassis footprint for manoeuvrability, with quickly deployed stabilising legs and smooth-rolling castors for easy relocation between lifts. Its versatility supports a wide range of lifting accessories, including hoists, winches and vacuum devices, broadening its use across glazing, cladding, mechanical installation and general materials handling.

This combination of compact size, controlled rotation and adaptable counterbalance makes the MRC 751 a high-precision solution for safe, repeatable lifting in environments where traditional cranes cannot operate effectively.

Key Features

- 720kg capacity at minimum outreach
- 360° slewing for accurate load placement
- Standard boom max outreach to 1.6m
- Standard boom max hook height to 3.3m
- Optional long boom with full outreach to 2.52m
- Adjustable outriggers for stability
- Modular counterweight system for stability
- Compatible with hoists, winches and vacuum lifters
- Weight: 940kg

Reference Code
MCO36

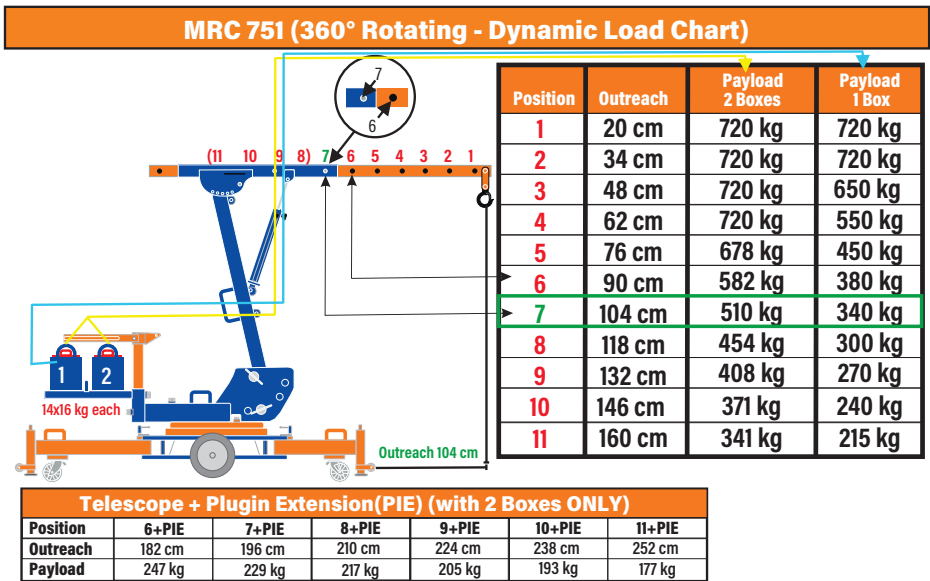

The slewing ring gives full 360° rotation with multi-position lifting angles while retaining a compact footprint.



The MRC751 can be used with either one or two counterweight boxes giving more flexibility for operators and installers.



At minimum extension, the MRC751 can lift up to 720kg.



The MRC751 features full lockable 360° rotation with four outriggers for stability when lifting.

The MRC751, with a max hook height of 3.3m, when combined with a suitable lifter gives the ability to install glass, cladding or stone.



Technical Data (mm)

