

Tilting Glass Trolley 600

[600kg]

The 600kg capacity tilting glass trolley can transport loads through confined work areas. Built with an integrated tilting system, the Tilting Glass Trolley 600 can be continuously adjusted to its working environment, making it perfect for passing through low entrance doors, passageways and façade openings of varying sizes.


The manual tilting functionality can be controlled in two stages; stage 1, 8° - 35° and stage 2, 15° - 45°, making it ideal for use on busy construction sites, restricted access areas and more.

Key Features

- Capacity: 600kg
- Two stages: Stage 1 (8° - 35°)
Stage 2 (15° - 45°)
- Min glass dimensions: 1500mm (l) x 1000mm (h)
- Max glass dimensions: 2500mm (l) x 3200mm (h)
- Weight: 84kg

Reference Code

AGT18

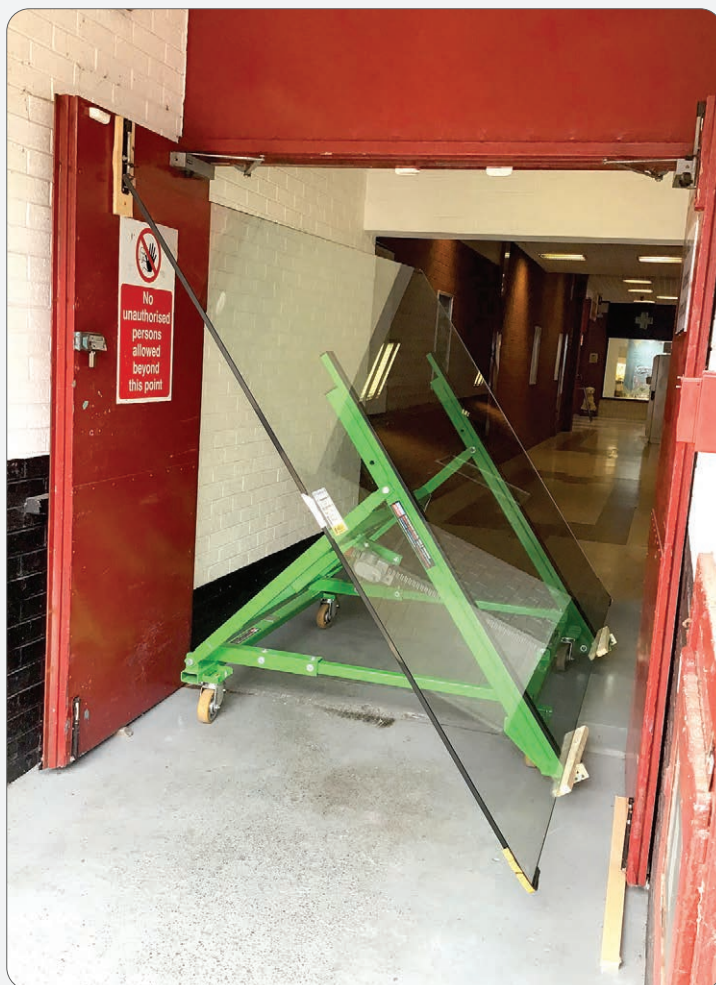

Technical Data (mm)

